

## **DETAILS**

## Designed for:

Kitchen Servery Windows Outdoor Entertainment Enclosing

Constructed with:

10mm Toughened Safety Glass AS1288

Options: Clear

Grey Tint

Low-E

### Hardware:


1.80 Silver Series Roller with 180kg weight load, ZZ sealed on both sides, roller wheel bearings, encased with polymer caps

Max Height: 1900mm

Max Width: 4000mm (custom can be unlimited)

Warranty:

6 Year AGWA Warranty

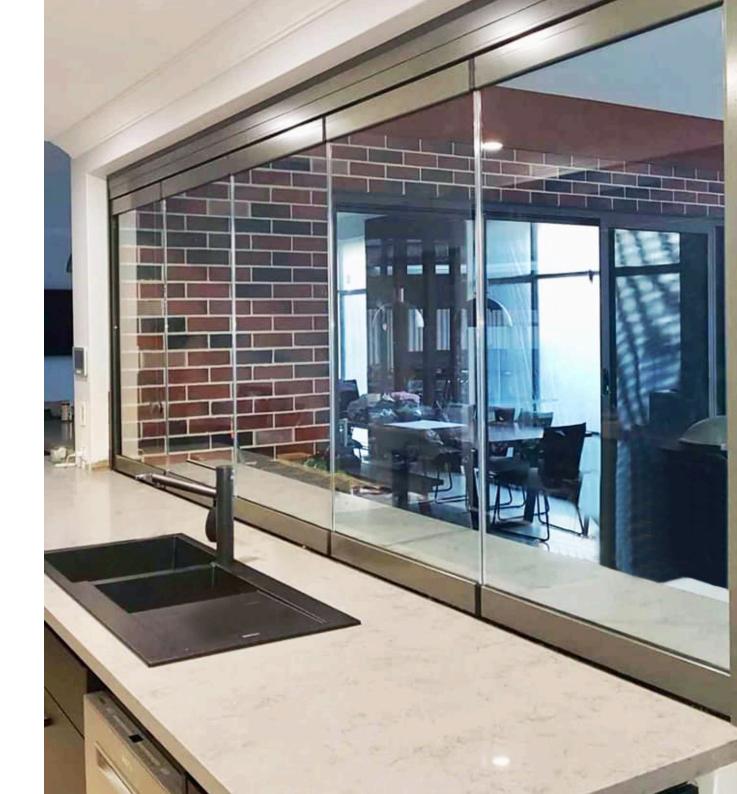

## WHY CLEAR EDGE GLASS?

### OUR PROMISE - YOUR PEACE OF MIND





#### Points of Distinction

#### ✓ 100% Australian

All hardware, componentry and profiles are produced on our shores using Australian raw materials.

#### Quality Hardware

Each component is made to the best quality to ensure that you have years worth of hassle free use and complete enjoyment

#### Warranty Protection

We offer a AGWA 6 year warranty on all our systems.

#### Proud Members of the Australian Glass and Window Association

As a member of the AGWA we are held to a strict code of ethics. These ethics ensure that your products will be built to the Australian Standards.

#### ✓ Compliant AS2047 AS1288

Our systems have been tested in NATA Accredited Facility and achieved outstanding results

#### DIY Install

As a builder, chippy or general handy-man you can self-install - saving you time and money with no additional trades on site and full control of your schedule.



# **BENIFITS**

#### ▼ Frameless = Invisible

Clean clear lines. Open or closed its almost invisible..

## Completely Retractable

This allows the outdoor space to be used as it was designed to be..

## Small Stacking Area

Small stacking area when panels are open, giving maximum use of the benchtop surface



## Create Airflow and Light


Immediately create an open light area, with excellent ventilation and fresh air flow

## Open Kitchen to the Outside

Create free flow to outside entertainment area

### Increase Property Value

With the installation of a Clear Edge System you immediately add value to your home

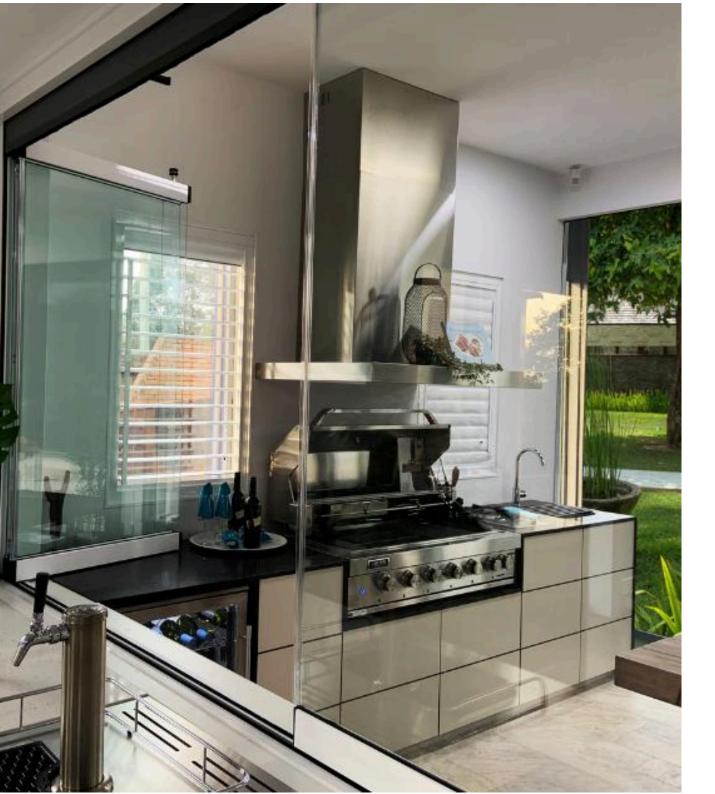

## **SPECIFICATIONS**

Outter Frame Thickness:

Top Frame: 106mm Side Frame: 30mm

Bottom Frame: 52mm (Can be fully recessed)

**Bottom Frame Option:** 

Frame Fully Lipped: Width 89mm Frame with No Lip: Width 48mm

Glass Seals:

Clear UV Stable (capital H) weather strip

Handle:

Stainless Steel Cable, with double latch


Lock Option:


Mortise Sill Lock with key inside Mortise Sill Lock with thumb-turn inside

**Colour Options:** 

Full Standard Dulux powder coat range Clear Anodized

# KEEPING IT AS EASY AS...







Step 1

Get the measurements from site, using guidance from our website or over the phone with our Design Consultant

Step 2

Place the order and pay

Step 3

We manufacture the system in flat pack form

Step 4

We dispatch the system, neatly boxed and labeled

Step 5

You install the system, with the help from our easy to follow step by step instruction manual or over the phone with our Technical Advisor

Step 6

ENJOY YOUR NEW FRAMELESS SERVERY!

